
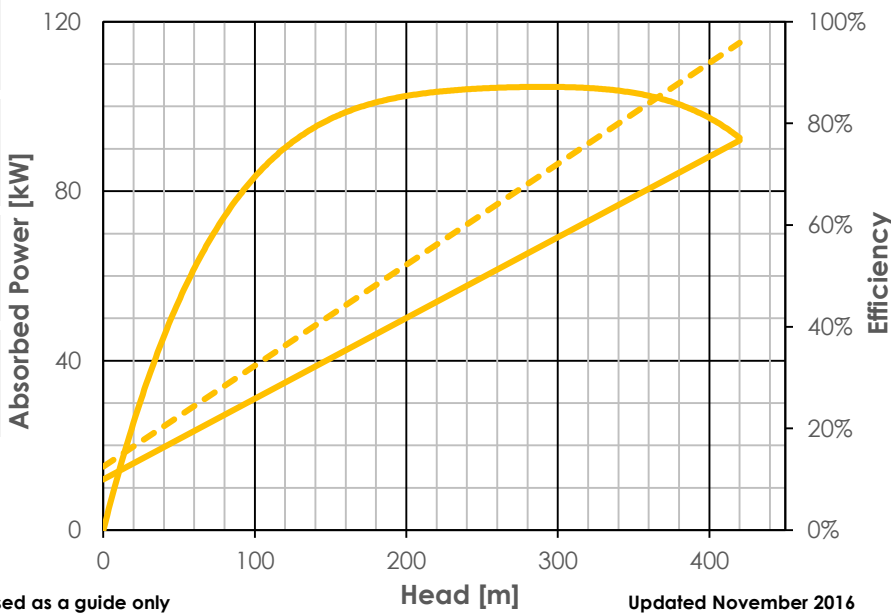


Nominal Flow	Maximum Head
20 L/Sec	420 m

### Typical Average Performance

Rotation	Anticlockwise
Maximum Speed	400 rpm
Nominal Speed	320 rpm
Pulley Ratio	3:1
Motor Size	110 kW
Maximum Pressure Difference	4200 kPa
Starting Torque	1950 Nm
Motor Poles	6
Inlet Flange	DN200 ANSI CL150
Outlet Flange	DN200 ANSI CL600
Solids Handling Hard Angular Soft Compressible	20 mm 62 mm
Performance Tolerance	±10%

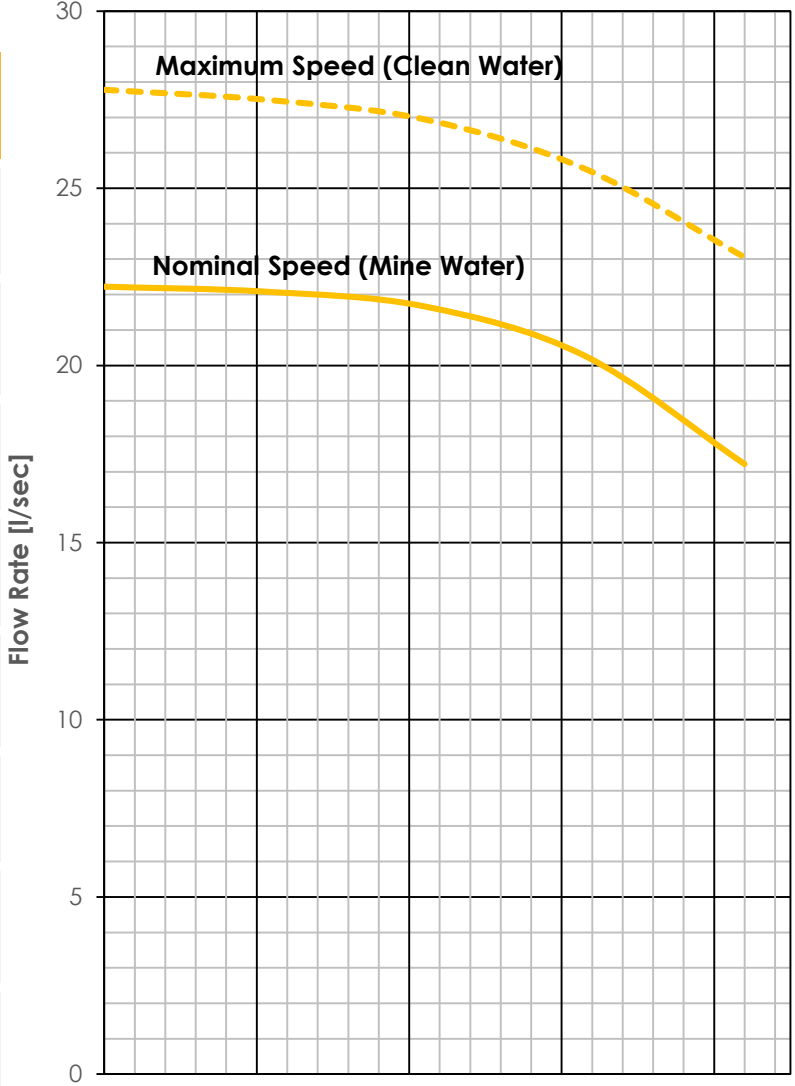

Tested on water at 20°C  
For water temperatures greater than 30°C consult  
Challenge Pumps